



Slagbomen en toegangspoorten



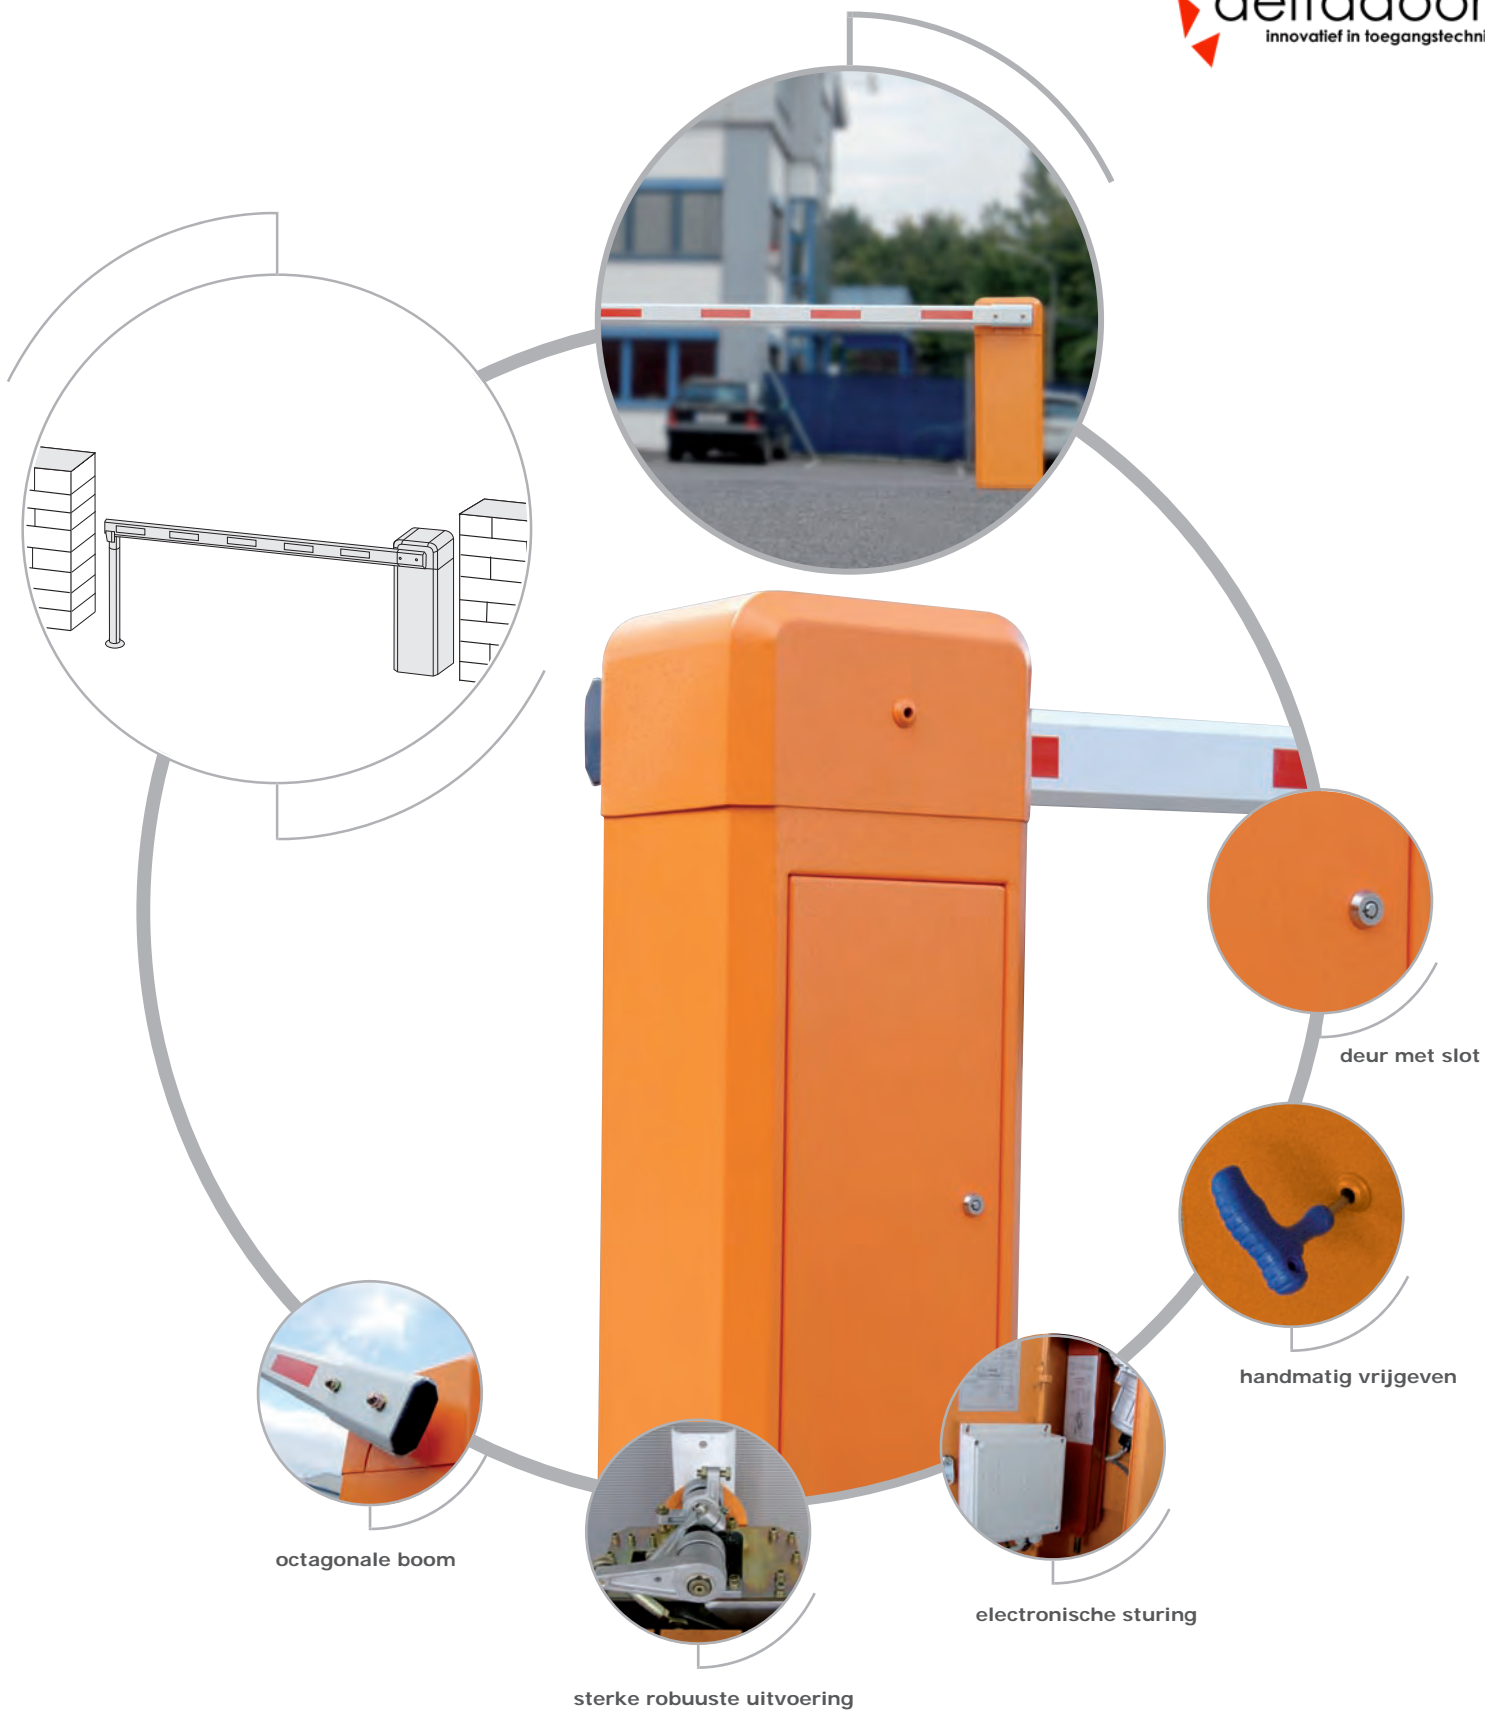

Links



Rechts




Arm 90°^{oA}



Arm 180°



Opvangsteun

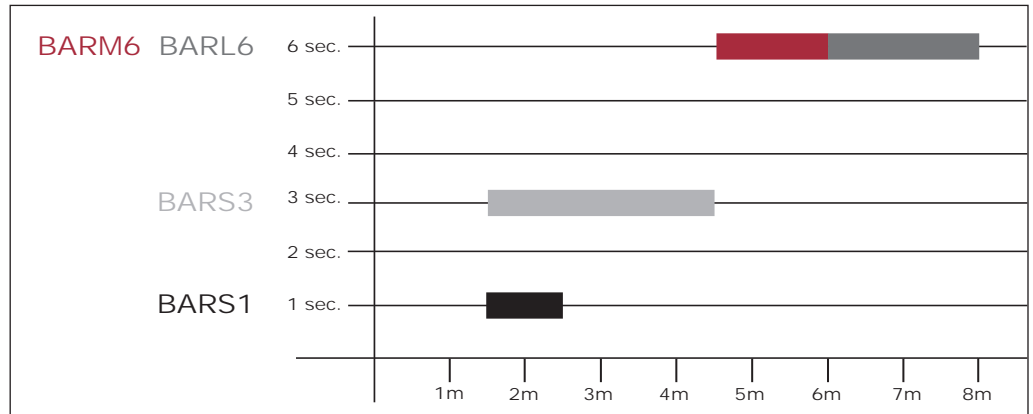

Technische Data

	BARS1	BARS3	BARM6	BARL6
Opening Time (Seconds)	1	3	6	6
Closing Time (Seconds)	1	3	6	6
Max. Length Straight Boom (mm)	2500	4500	6000	8000
Max. Length 90° Folding Boom (mm)	-	3200	-	-
Max. Length 180° Folding Boom (mm)	-	3020	-	-
Duty Rating (%)	100	100	100	100
Max. Cycles per Day	900	500	200	200
Warranty (Years)	2	2	2	2
Voltage IN (V)	220-240	220-240	220-240	220-240
Frequency (Hz)	50	50	50	50
Consumption Nominal (A)	1	1	1	1
Power (W)	100	120	120	120
Motor Voltage (V)	230	230	230	230
Motor RPM (rpm)	933	933	933	933
Capacitor (µF)	9+9	9+9	9+9	9+9
Rating of Housing (IP)	45	45	45	45
Rating Control Board Box (IP)	56	56	56	56
Temp. Range (°C)	-25°/75°	-25°/75°	-25°/75°	-25°/75°
Cooling Fan for Motor	-	yes	yes	yes
Overheat Protection Motor (°C)	140	140	140	140
Housing:				
Width Door Side (mm)	325	325	325	325
Depth (mm)	282	282	282	282
Height (mm)	930	930	930	930
Pivot Point / Bar Height (mm)	830	830	830	830
Housing Color Standart (RAL)	2003	2003	2003	2003
Weight with Transport Box (kg)	60	60	60	60

Model & carton content chart

Model	Drive Unit	Mounting Bar (2x)	Mounting bolt (concrete)	Service Door	Electronic control	Limit Switch (optical)	Release (manual)	Release Key	Radio	Radio connector cable	Number of cartons
BARS1			4x					1x	-		1
BARS3			4x					1x	-		1
BARM6			4x					1x	-		1
BARL6			4x					1x	-		1

Accessories

	BAR-BM3*	BAR-BM4*	BAR-BM6*	BAR-BM8*	BAR-B90*	BAR-B180*	BAR-H2
	Boom	Boom	Boom	Boom	90° Boom	180° Boom	Boom Holder
Delivery Size (mm)	3000	4500	6000	8000	3200	3000	-
Profile Type	Octagonal	Octagonal	Octagonal	Octagonal	Octagonal	Octagonal	Octagonal
Height x Width (mm)	100 x 45	100 x 45	100 x 45	100 x 45	100 x 45	100 x 45	770-810
Weight (kg /m)	0.9 - 1.05	0.9 - 1.05	0.9 - 1.05	0.9 - 1.05	0.9 - 1.06	0.9 - 1.07	1.5
Used for:							
	BARS1						
	BARS3						
	BARM6						
	BARL6						

* Barrier Boom length is not equal closing length of road.
Delivered boom length can vary 20mm.